

PILE DRIVER

TURCHI

260-F

- QUALITY MACHINE
- PERFORMANCE
- SAFETY
- PRODUCTIVITY
- COMPACT
- POWERFUL
- VERSATILE
- RELIABLE
- EASY MAINTENANCE
- OPERATOR TRAINING
- TECH SUPPORT
- MECHANICAL TRAINING
- SPARE PARTS WAREHOUSES:
 - ◆ EUROPE
 - ◆ USA
 - ◆ AUSTRALIA



turchi@aleanda.com
info.eu@aleanda.com

SPECIFICATIONS

Hammer



Brand		Indeco
Power	Joule	950
Blows	n/min	620 / 1500
Hammer Weight	Kg	350
	Lb	771
Noise Rating	DbA	xx/114

Machine Travel Speed

Low Speed	km/h	2,12
	miles/h	1,32

Maximum Post Size

Height	Meter	3,5
	Foot	9'8"
Side	mm	200/160
	Inches	8"/6"

Machine Dimensions

Height	mm/inches	2,600 / 102
Width	mm/inches	2,200 / 87
Length	mm/inches	1,930 / 76
Weight	kg/lb	3,500 / 7,716

Engine Option 1

DOOSAN

Brand, model	Doosan D18	
Cylinders	3	
Displacement	cm ³	1800
Power at 2.500 RPM	KW	41
Power at 2.600 RPM	KW	45
Cooled	water cooling	
Emmision control	stage 5	

Engine Option 2

YANMAR

Engine	Yanmar 4TNV88	
Cylinders	4	
Displacement	cm ³	2.190 cm ³
Power at 3.000 RPM	KW	34,4
Power at 2.600 RPM	KW	31,3
Emmision control	stage 3/5	

Hydraulic System




Oil Tank Size	litres	120
	US gallons	32
Oil Pressure	Bar	170
Fuel Tank Size	litres	50
	US gallons	13

Inclination Capabilities

Column Inclination	degrees	+10 to 51
Lateral Inclination	degrees	+10 to -10

TRANSPORT DIMENSIONS



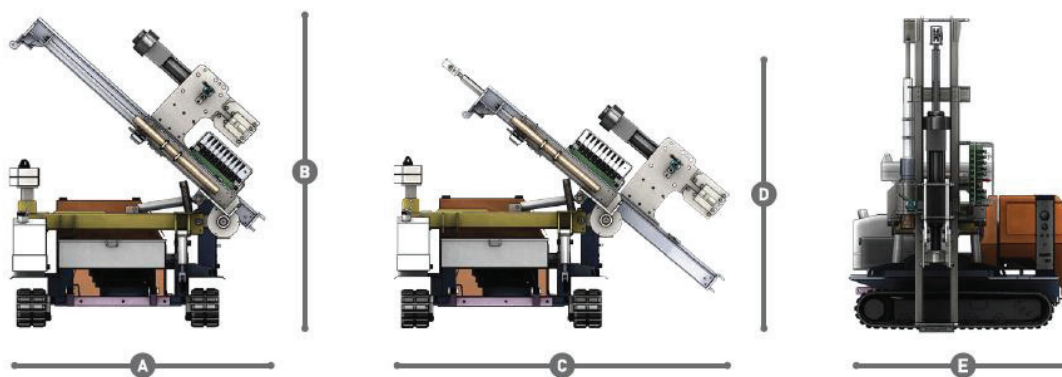


KEY

A	2,350mm	93"	C	3,040mm	120"	E	1,960mm	77"
B	2,690mm	106"	D	2,400mm	94"			

turchi@aleanda.com
info.eu@aleanda.com

THE BEST QUALITY AND PERFORMANCE

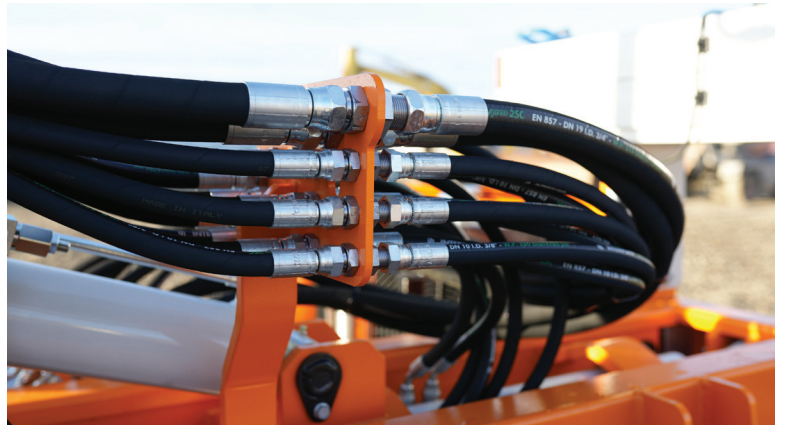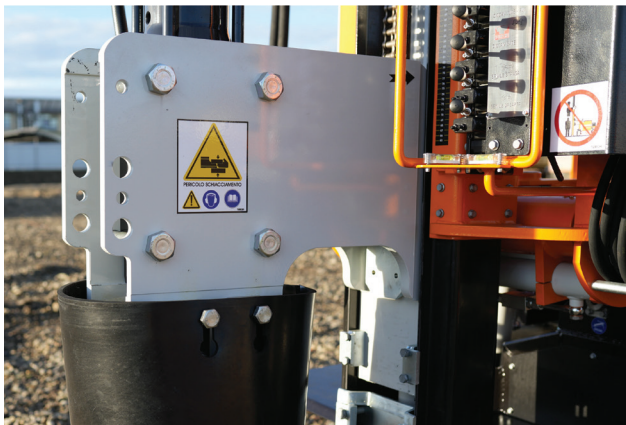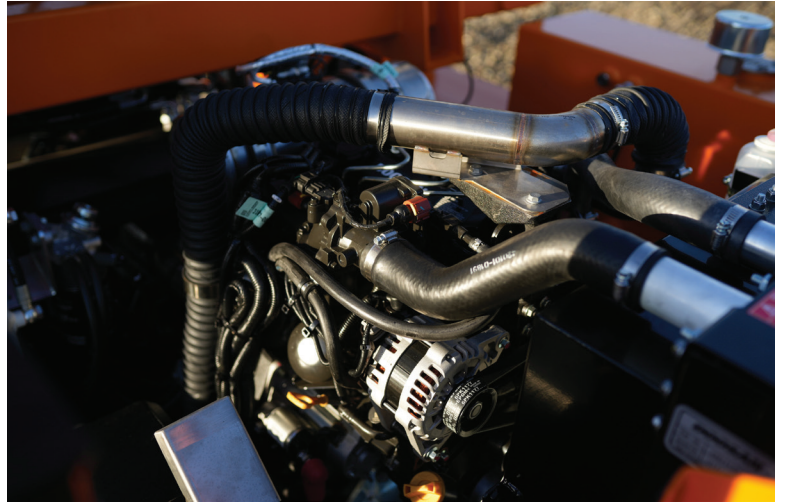

turchi@aleanda.com
info.eu@aleanda.com