

# PILE DRIVER

**300/F**

- UP TO 6M OR 19'8" POST HEIGHT
- QUALITY MACHINE
- PERFORMANCE
- SAFETY
- PRODUCTIVITY
- COMPACT
- POWERFUL
- VERSATILE
- RELIABLE
- EASY MAINTENANCE
- OPERATOR TRAINING
- TECH SUPPORT
- MECHANICAL TRAINING
- SPARE PARTS WAREHOUSES:
  - ◆ EUROPE
  - ◆ USA
  - ◆ AUSTRALIA



turchi@aleanda.com  
info.eu@aleanda.com

# SPECIFICATIONS

## Hammer



Brand		Indeco
Power	Joule	950 / 1200
Blows	n/min	620-1500 / 570-1180
Hammer Weight	Kg	350 / 450
	Lb	771 / 992
Noise Rating	DbA	xx/114

## Machine Travel Speed

Low Speed	km/h	1,92
	miles/h	1,2
High Speed	km/h	3,33
	miles/h	2,1

## Maximum Post Size

Height	Meter	4.4 / 5.2 / 6
	Foot	13'1" / 16'4" / 19'7"
Side	mm	220/220
	Inches	9"/9"

## Machine Dimensions

Height	mm/inches	2,670 / 105
Width	mm/inches	2,350 / 93
Length	mm/inches	2,100 / 83
Weight	kg/lb	4,500 / 9,920

## Engine Option 1

## DOOSAN

Brand, model	Doosan D18	
Cylinders	3	
Displacement	cm <sup>3</sup>	1800
Power at 2.500 RPM	KW	41
Power at 2.600 RPM	KW	45
Cooled	water cooling	
Emmision control	stage 5	

## Engine Option 2

## YANMAR

Brand, model	Yanmar 4TNV88	
Cylinders	4	
Displacement	cm <sup>3</sup>	2.190
Power at 3.000 RPM	KW	34,4
Power at 2.600 RPM	KW	31,3
Emmision control	stage 3/5	

## Hydraulic System




Oil Tank Size	litres	180
	US gallons	37
Oil Pressure	Bar	190
Fuel Tank Size	litres	60
	US gallons	16

## Inclination Capabilities

Column Inclination	degrees	+10 to -51
Lateral Inclination	degrees	+10 to -10

# TRANSPORT DIMENSIONS

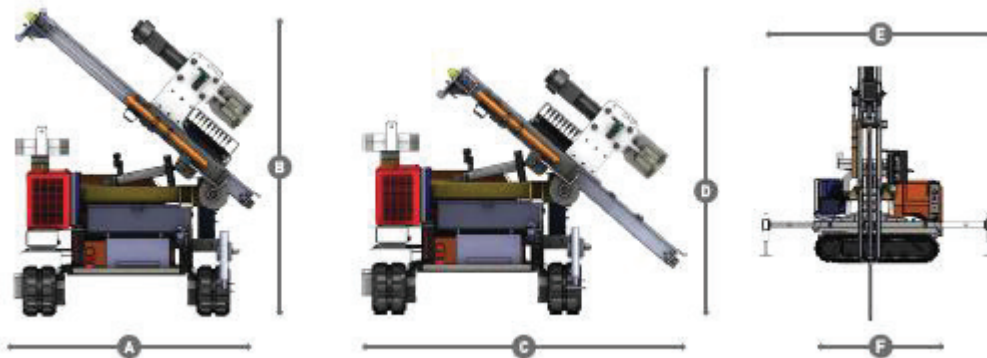

## KEY

A	2,350mm	93"	C	3,030mm	120"	E	3,780mm	149"
B	2,900mm	114"	D	2,310mm	91"	F	2,088mm	82"

turchi@aleanda.com  
info.eu@aleanda.com

# THE BEST QUALITY AND PERFORMANCE



turchi@aleanda.com  
info.eu@aleanda.com